



# Product Submittal Sheet

Tech Support / Sales: 800-334-1676  
www.tamlyn.com

## XtremeTrim® Vertical Siding H Mold

### 07 46 00 (SIDING ACCESSORIES)

#### DESIGN FEATURES

Designed to cover vertical joints in siding. Longer lasting and more effective than contractor grade caulk. Provides a smooth seam at joints.

#### MATERIAL

6063-T5 .050" ± .005 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

#### FINISH


Unless specified all XtremeTrim® items are provided in primed finish. Also available in popular siding/soffit colors in standard face only color match or full coverage CoastalColorCoating™. Clear Anodized is stocked and custom anodized is available (minimums apply).

#### NOTE

Use of the XtremeTrim® Vertical Siding H Mold at horizontal joints is not recommended.



Vertical Siding H Mold

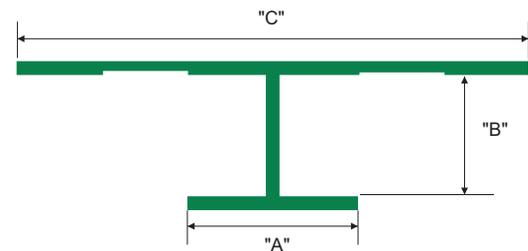

ITEM ID	"A"	"B"	"C"	SIDING SIZE
SHM5168*	1/2"	3/8"	1-1/2"	5/16"
SHM51610	1/2"	3/8"	1-1/2"	5/16"
SHM71610	3/4"	15/32"	2"	7/16"
SHM588*	3/4"	5/8"	2-1/4"	5/8"
SHM5810	3/4"	5/8"	2-1/4"	5/8"
SHM3410	3/4"	3/4"	1-3/4"	3/4", 5/16" Lap
SHM110	1"	1"	2-1/2"	1"

All parts are 10' Length unless otherwise indicated - \*8' Length

#### Green Building and LEED

Tamlyn products can earn or contribute to credits in categories MR 4.1 and MR 4.2. These credits require a minimum percentage of the value of the building materials to be recycled. Tamlyn products are typically made from 75-100% post industrial and post consumer scrap.

For more details and LEED letters contact Technical Support at 800-334-1676.

© 2017 R.H. Tamlyn & Sons, LP

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: