



Product Submittal Sheet

Tech Support / Sales: 800-334-1676
www.tamlyn.com

XtremeTrim® Window/Head Flashing

07 46 00 (SIDING ACCESSORIES)

DESIGN FEATURES

Provides an easy to install and long-lasting method of minimizing water penetration. Used over window trim, band boards, panel intersections, and other vertical surfaces.

MATERIAL



6063-T5 .050" ± .005 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

FINISH

Unless specified all XtremeTrim® items are provided in primed finish. Also available in popular siding/soffit colors in standard face only color match or full coverage CoastalColorCoating™. Clear Anodized is stocked and custom anodized is available (minimums apply).

NOTE

Do not install XtremeTrim® Window Flashing upside down on horizontal applications where the exterior flange can catch water.

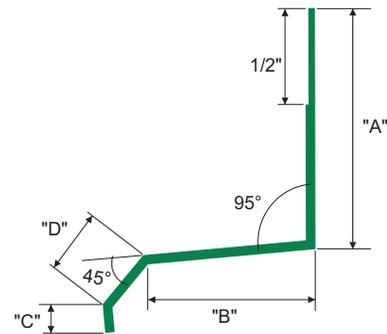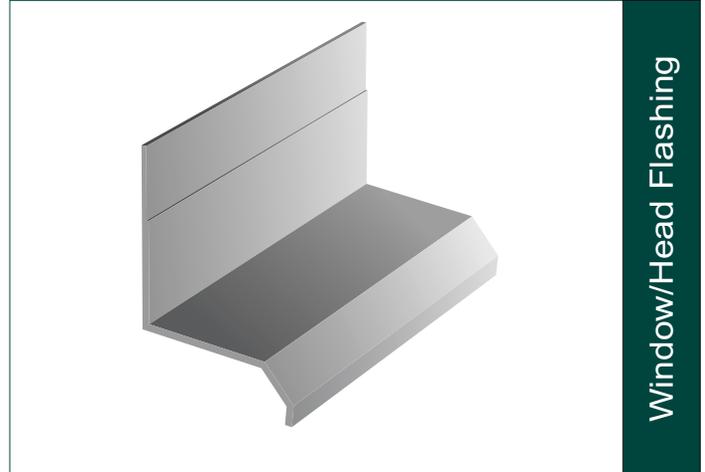

ITEM ID	"A"	"B"	"C"	"D"
XWF788	1-1/4"	7/8"	5/32"	5/16"
XWF1148	1-3/4"	1-1/4"	5/32"	5/16"
XWF1128	1-1/4"	1-1/2"	5/32"	5/16"
XWF1588	1-1/4"	1-5/8"	5/32"	5/16"

All parts are 8' Length unless otherwise indicated

Green Building and LEED

Tamlyn products can earn or contribute to credits in categories MR 4.1 and MR 4.2. These credits require a minimum percentage of the value of the building materials to be recycled. Tamlyn products are typically made from 75-100% post industrial and post consumer scrap.

For more details and LEED letters contact Technical Support at 800-334-1676.

© 2017 R.H. Tamlyn & Sons, LP

Project Information	Contractor Information	Architect Information
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax: